


- 1.1 Profile
  - 1.2 End cap
  - 1.3 LED tape
  - 1.4 Cover
- Lighting fixture
- 2.1 Threaded bolt
  - 2.2 Base
  - 2.3 Head
  - 2.4 Pressure screw
- FI-8-PRET-MR silver (ref. 42345)
- 3. Rod\*
  - 4. Ceiling fastener\*


\*The full range of accessories and electronics is available at [www.KlusDesign.eu](http://www.KlusDesign.eu)

**NOTE!** All LED tapes must be connected to a 12 V or 24 V power supply.


**IMPORTANT:** Not all possible mounting procedures are presented here. More mounting procedures and related accessories can be found at [www.KlusDesign.eu](http://www.KlusDesign.eu). Drawings of extrusions and accessories in these instructions are simplified and only approximate the actual shapes.

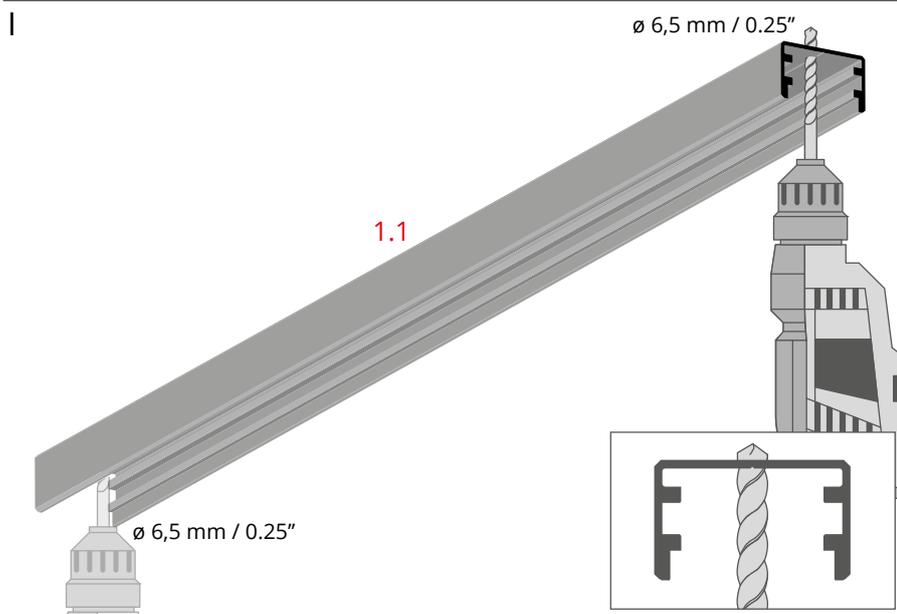

Drill holes in the profile (1.1) where the fasteners will be mounted.

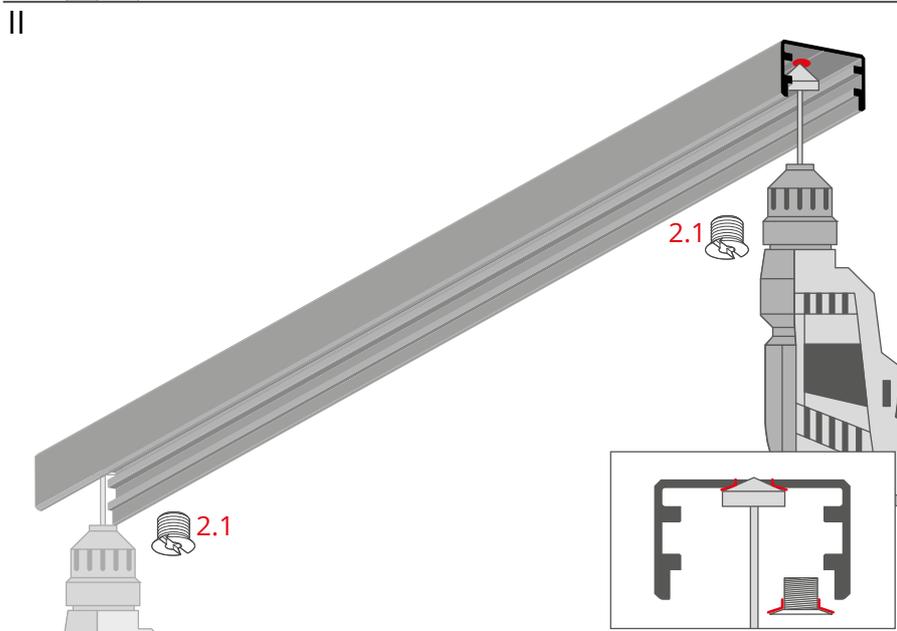


Chamfer the holes for threaded bolts (2.1).

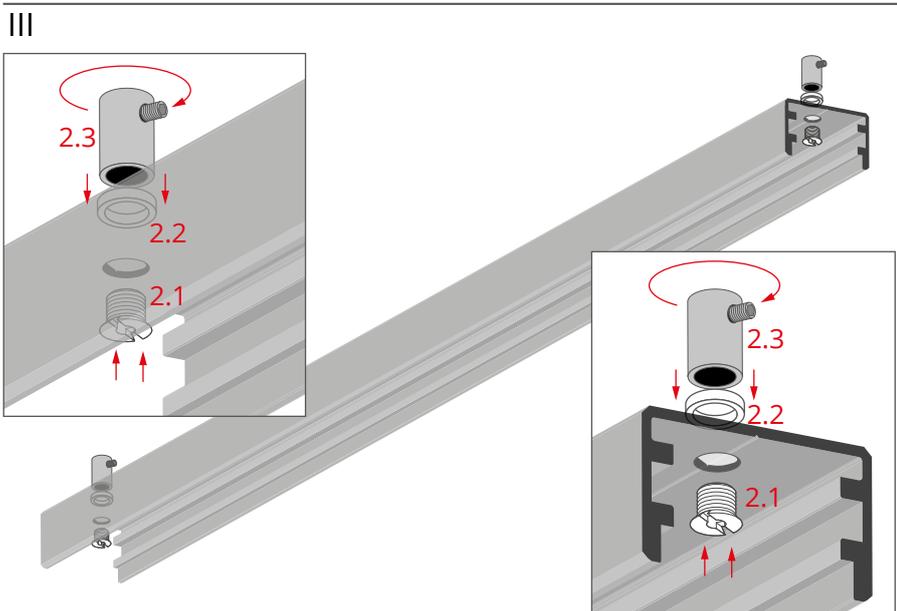

Insert the threaded bolts (2.1) into the drilled holes, put bases (2.2) on them and screw the heads (2.3) onto them.


IV

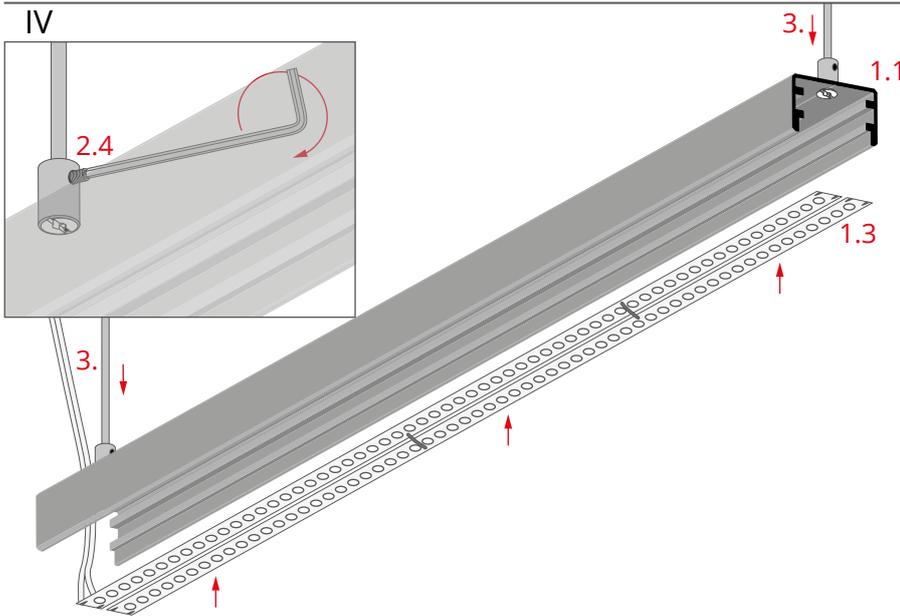

Mount and lock the rods (3), by tightening the pressure screws (2.4) in the heads of the fasteners.

Adhere the LED tapes (1.3) in the profile (1.1).

V

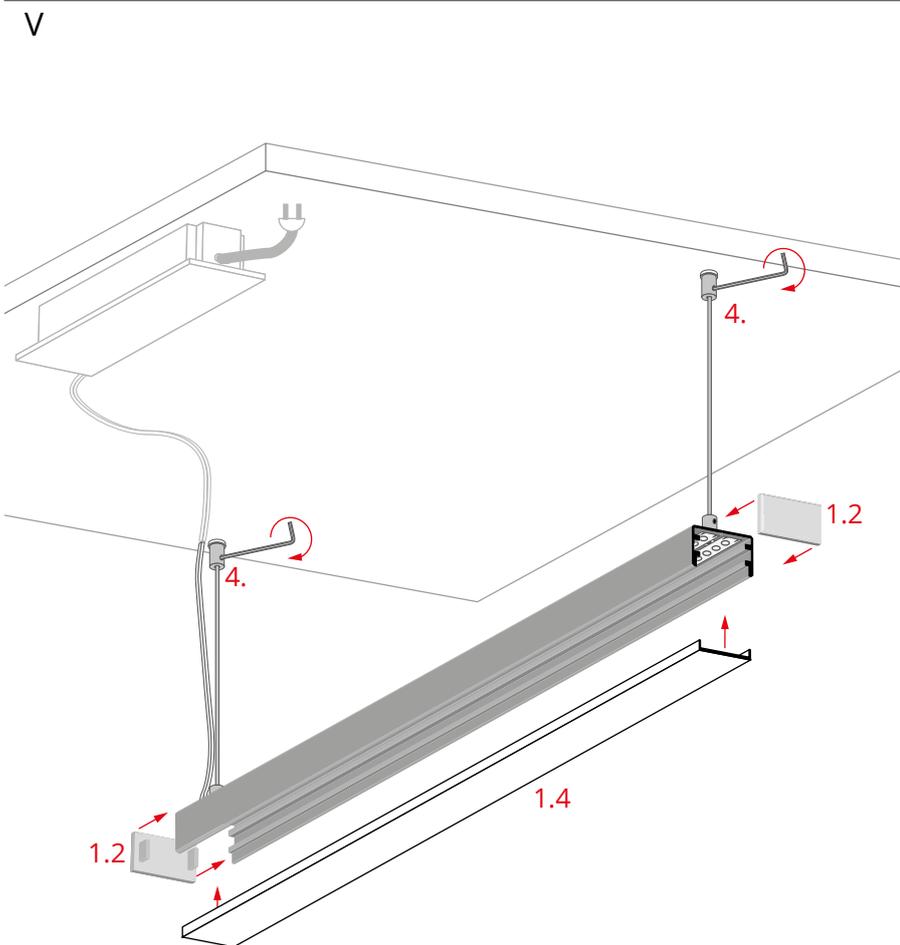

Mount the cover (1.4) and the end caps (1.2). Suspend the lighting fixture from the ceiling fasteners (4).