

FTPC150V-DA series

150W LED Constant voltage Switching Power Supply with DALI2 interface and push dimming function



■ Features:

- Constant voltage design
- European AC input range
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
 - Isolation class II
- Built-in active PFC function
 - Linear shape
- DALI2 and push dimming function
 - Dimming range: 1-100%



ELECTRICAL SPECIFICATION

MODEL	FTPC150V12-DA	FTPC150V24-DA
OUTPUT		
Rated Voltage	12V	24V
Rated Current	11A	6.25A
Rated Power	132W	
No Load Output Voltage (max.)	12.6V	25.2V
Line Regulation	± 1%	
Load Regulation	± 6%	
Voltage Tolerance [3]	± 5%	
Ripple & Noise (max.) [2]	1.50V _{p-p}	
Setup, Rise Time [4]	600ms, 20ms / 230VAC at full load	
Hold up Time (typ.)	1.5ms / 230VAC at full load	

INPUT

Voltage Range	180 ÷ 264VAC
Frequency Range	47 ÷ 63Hz
Power Factor (typ.)	PF > 0.9 / 230VAC at full load
Efficiency (typ.)	92%
AC current (typ.)	0.8A / 230VAC
Inrush current (max.)	50A / 230VAC (25°C)

DIMMING

Dimming Range	1 – 100% of rated output current
Dimming Type	DALI2 or PUSH DIMMING

FTPC150V-DA series

150W LED Constant voltage Switching Power Supply with DALI2 interface and push dimming function



PROTECTIONS

Over Current	Range: 110% - 160%
	Type: Hiccup mode auto-recovery.
Short Circuit	Type: Hiccup mode auto-recovery.
Over Voltage	< 18V < 36V
	Type: Hiccup mode auto-recovery.
Over Temperature	Range: 115°C ± 10°C
	Type: shut down output voltage. Re-power on to recovery.

WORKING ENVIRONMENT

Working Temperature	-40°C ÷ +45°C
Working Humidity	15 ÷ 95% RH non-condensing
Storage Temperature and Humidity	-40°C ÷ +80°C, 10 ÷ 95% RH non-condensing

SAFETY AND EMC REGULATIONS

Safety Standards	Compliance to EN61347-1, EN61347-2-13
Dali Standards	Compliance to IEC 62386-101, 102,207
Withstand Voltage	IN/OUT: 5.3kVDC
EMC Emission	Compliance to EN55015
EMC Immunity	Compliance to EN61547
Harmonic Current	Compliance to EN61000-3-2, EN61000-3-3

OTHERS

Dimensions	361.5 x 30 x 21.3mm (L x W x H)
Weight and Packing	0.22kg; 20pcs./ctn, ctn dimensions: 38x18x16.5 cm

EAN Code



5 902135 1133712



5 902135 1133729


1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

FTPC150V-DA series


150W LED Constant voltage Switching Power Supply with DALI2 interface and push dimming function



MECHANICAL SPECIFICATION

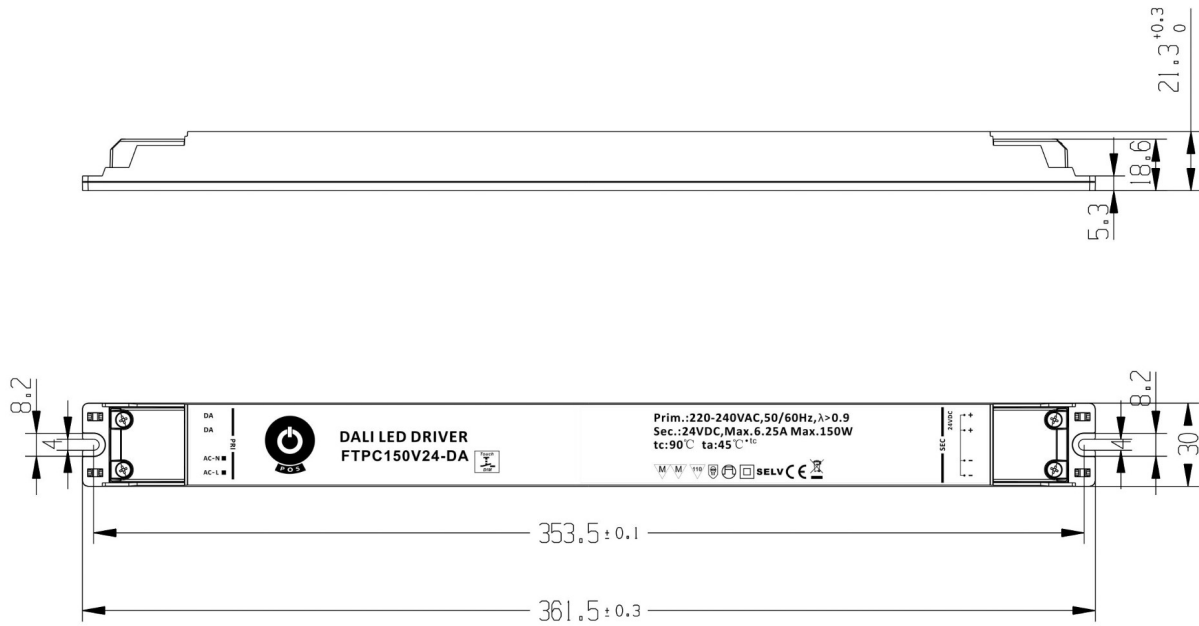

PUSH DIMMING WIRING DIAGRAM

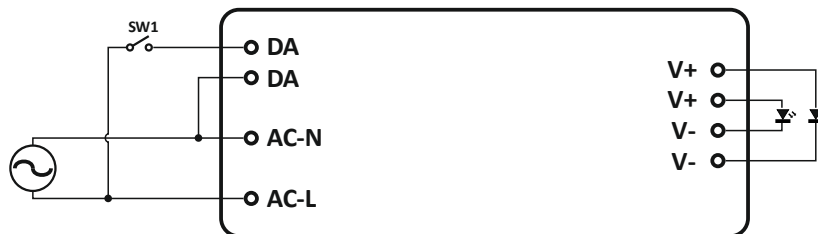

Push Dimming

No.	Push Time	Function
1.	< 0.05 sec	No status change
2.	0.1-1 sec	Output On / Output Off
3.	1.5-10 sec	Dimming up / Dimming down
4.	> 11 sec	100% brightness setting

Remarks:


1. SW1 – monostable (doorbell) switch
2. Factory setting is 100% brightness

FTPC150V-DA series

150W LED Constant voltage Switching Power Supply with DALI2 interface and push dimming function



DALI WIRING DIAGRAM

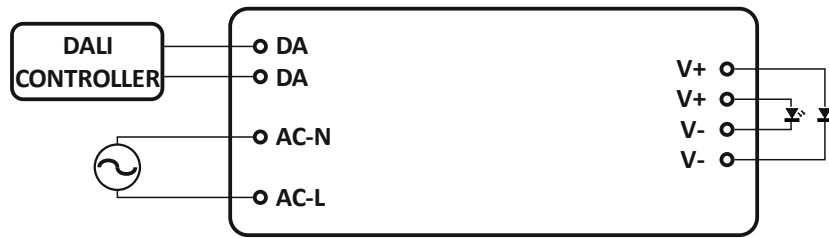

PIN ASSIGNMENT		
Function	Description DALI	Description Push Dimming
DA	DA signal	Neutral wire
DA	DA signal	Live wire
AC-N		Input: AC-N
AC-L		Input: AC-L
Vout +		Output: U _{OUT+}
Vout -		Output: U _{OUT-}