

# GPV-100 series

100W Single Output Switching Power Supply



## ■ Features:

- Constant voltage design
- Universal AC input / Full range
- Protections: Short circuit / Overcurrent / Over voltage
- Cooling by free air convection
- 100% full load burn-in test
- Isolation class II
- Fully encapsulated with IP67 level



## ELECTRICAL SPECIFICATION

MODEL	GPV-100-12	GPV-100-24
<b>OUTPUT</b>		
DC VOLTAGE	12V	24V
RATED CURRENT	8.3A	4.2A
CURRENT RANGE	0 ÷ 8.3A	0 ÷ 4.2A
RATED POWER	99.6W	100.8W
LINE REGULATION	± 1%	
LOAD REGULATION	± 2%	
VOLTAGE TOLERANCE [3]	± 5%	
RIPPLE & NOISE (max.) [2]	200mV <sub>p-p</sub>	300mV <sub>p-p</sub>
SETUP, RISE TIME [4]	1300ms, 80ms / 230VAC; 2500ms, 80ms / 115VAC at full load	
HOLD UP TIME (typ.)	40ms / 115VAC, 40ms / 230VAC at full load	
<b>INPUT</b>		
VOLTAGE RANGE	90 ÷ 264VAC	
FREQUENCY RANGE	47 ÷ 63Hz	
EFFICIENCY (typ.)	87%	88%
AC CURRENT (typ.)	2A/115VAC, 1A / 230VAC	
INRUSH CURRENT (typ.)	75A / 230VAC	
LEAKAGE CURRENT(max.)	1mA / 240VAC	
<b>PROTECTIONS</b>		
OVERCURRENT	Range: 95 ÷ 110%	
	Type: constant current limiting, recovers automatically after fault condition is removed	
SHORT CIRCUIT	Type: constant current limiting, recovers automatically after fault condition is removed	
OVER VOLTAGE	18 ÷ 22V	28 ÷ 34V
	Type: shut down o/p voltage, re-power on to recover	

# GPV-100 series

100W Single Output Switching Power Supply



## ENVIRONMENT

<b>WORKING TEMPERATURE</b>	-30°C ÷ 70°C (Refer to Derating Curve)
<b>WORKING HUMIDITY</b>	20 ÷ 90% RH non-condensing
<b>STORAGE TEMPERATURE AND HUMIDITY</b>	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing
<b>TEMPERATURE COEFFICIENT</b>	± 0.03% / °C (0°C ÷ 50°C)
<b>VIBRATION</b>	10 ÷ 500Hz, 2G, 10min / cycle, period for 60min. each along X, Y, Z axes

## SAFETY & EMC REGULATIONS


<b>SAFETY STANDARDS</b>	Compliance to EN61347-1, EN61347-2-13, IP67
<b>WITHSTAND VOLTAGE</b>	I-P/O-P: 3kVAC
<b>ISOLATION RESISTANCE</b>	I-P/O-P: 100MΩ/500VDC/25°C/70%
<b>EMC EMISSION</b>	Compliance to EN55015, EN55022 class B
<b>EMC IMMUNITY</b>	Compliance to EN61547; EN55024; EN61000-4-2, -3, -4, -5, -6, -8, -11
<b>HARMONIC CURRENT</b>	Compliance to EN61000-3-3; EN61000-3-2

## OTHERS

<b>DIMENSIONS</b>	187 x 52 x 37mm
<b>WEIGHT AND PACKING</b>	0.6kg; 20pcs./box; box weight and dimensions: 12.5kg; 23.5 x 27.5 x 19.5cm

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment must be re-qualify to comply with EMC Directives.

## MECHANICAL SPECIFICATION

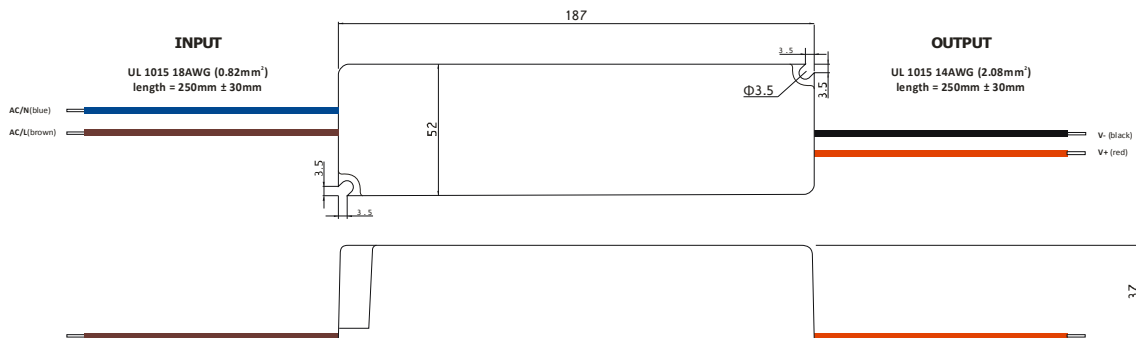

## DERATING CURVE

