


BIN

SDCM

CCT · 3001K, BIN · E20


ENERGY STAR ANSI C78.377-2011

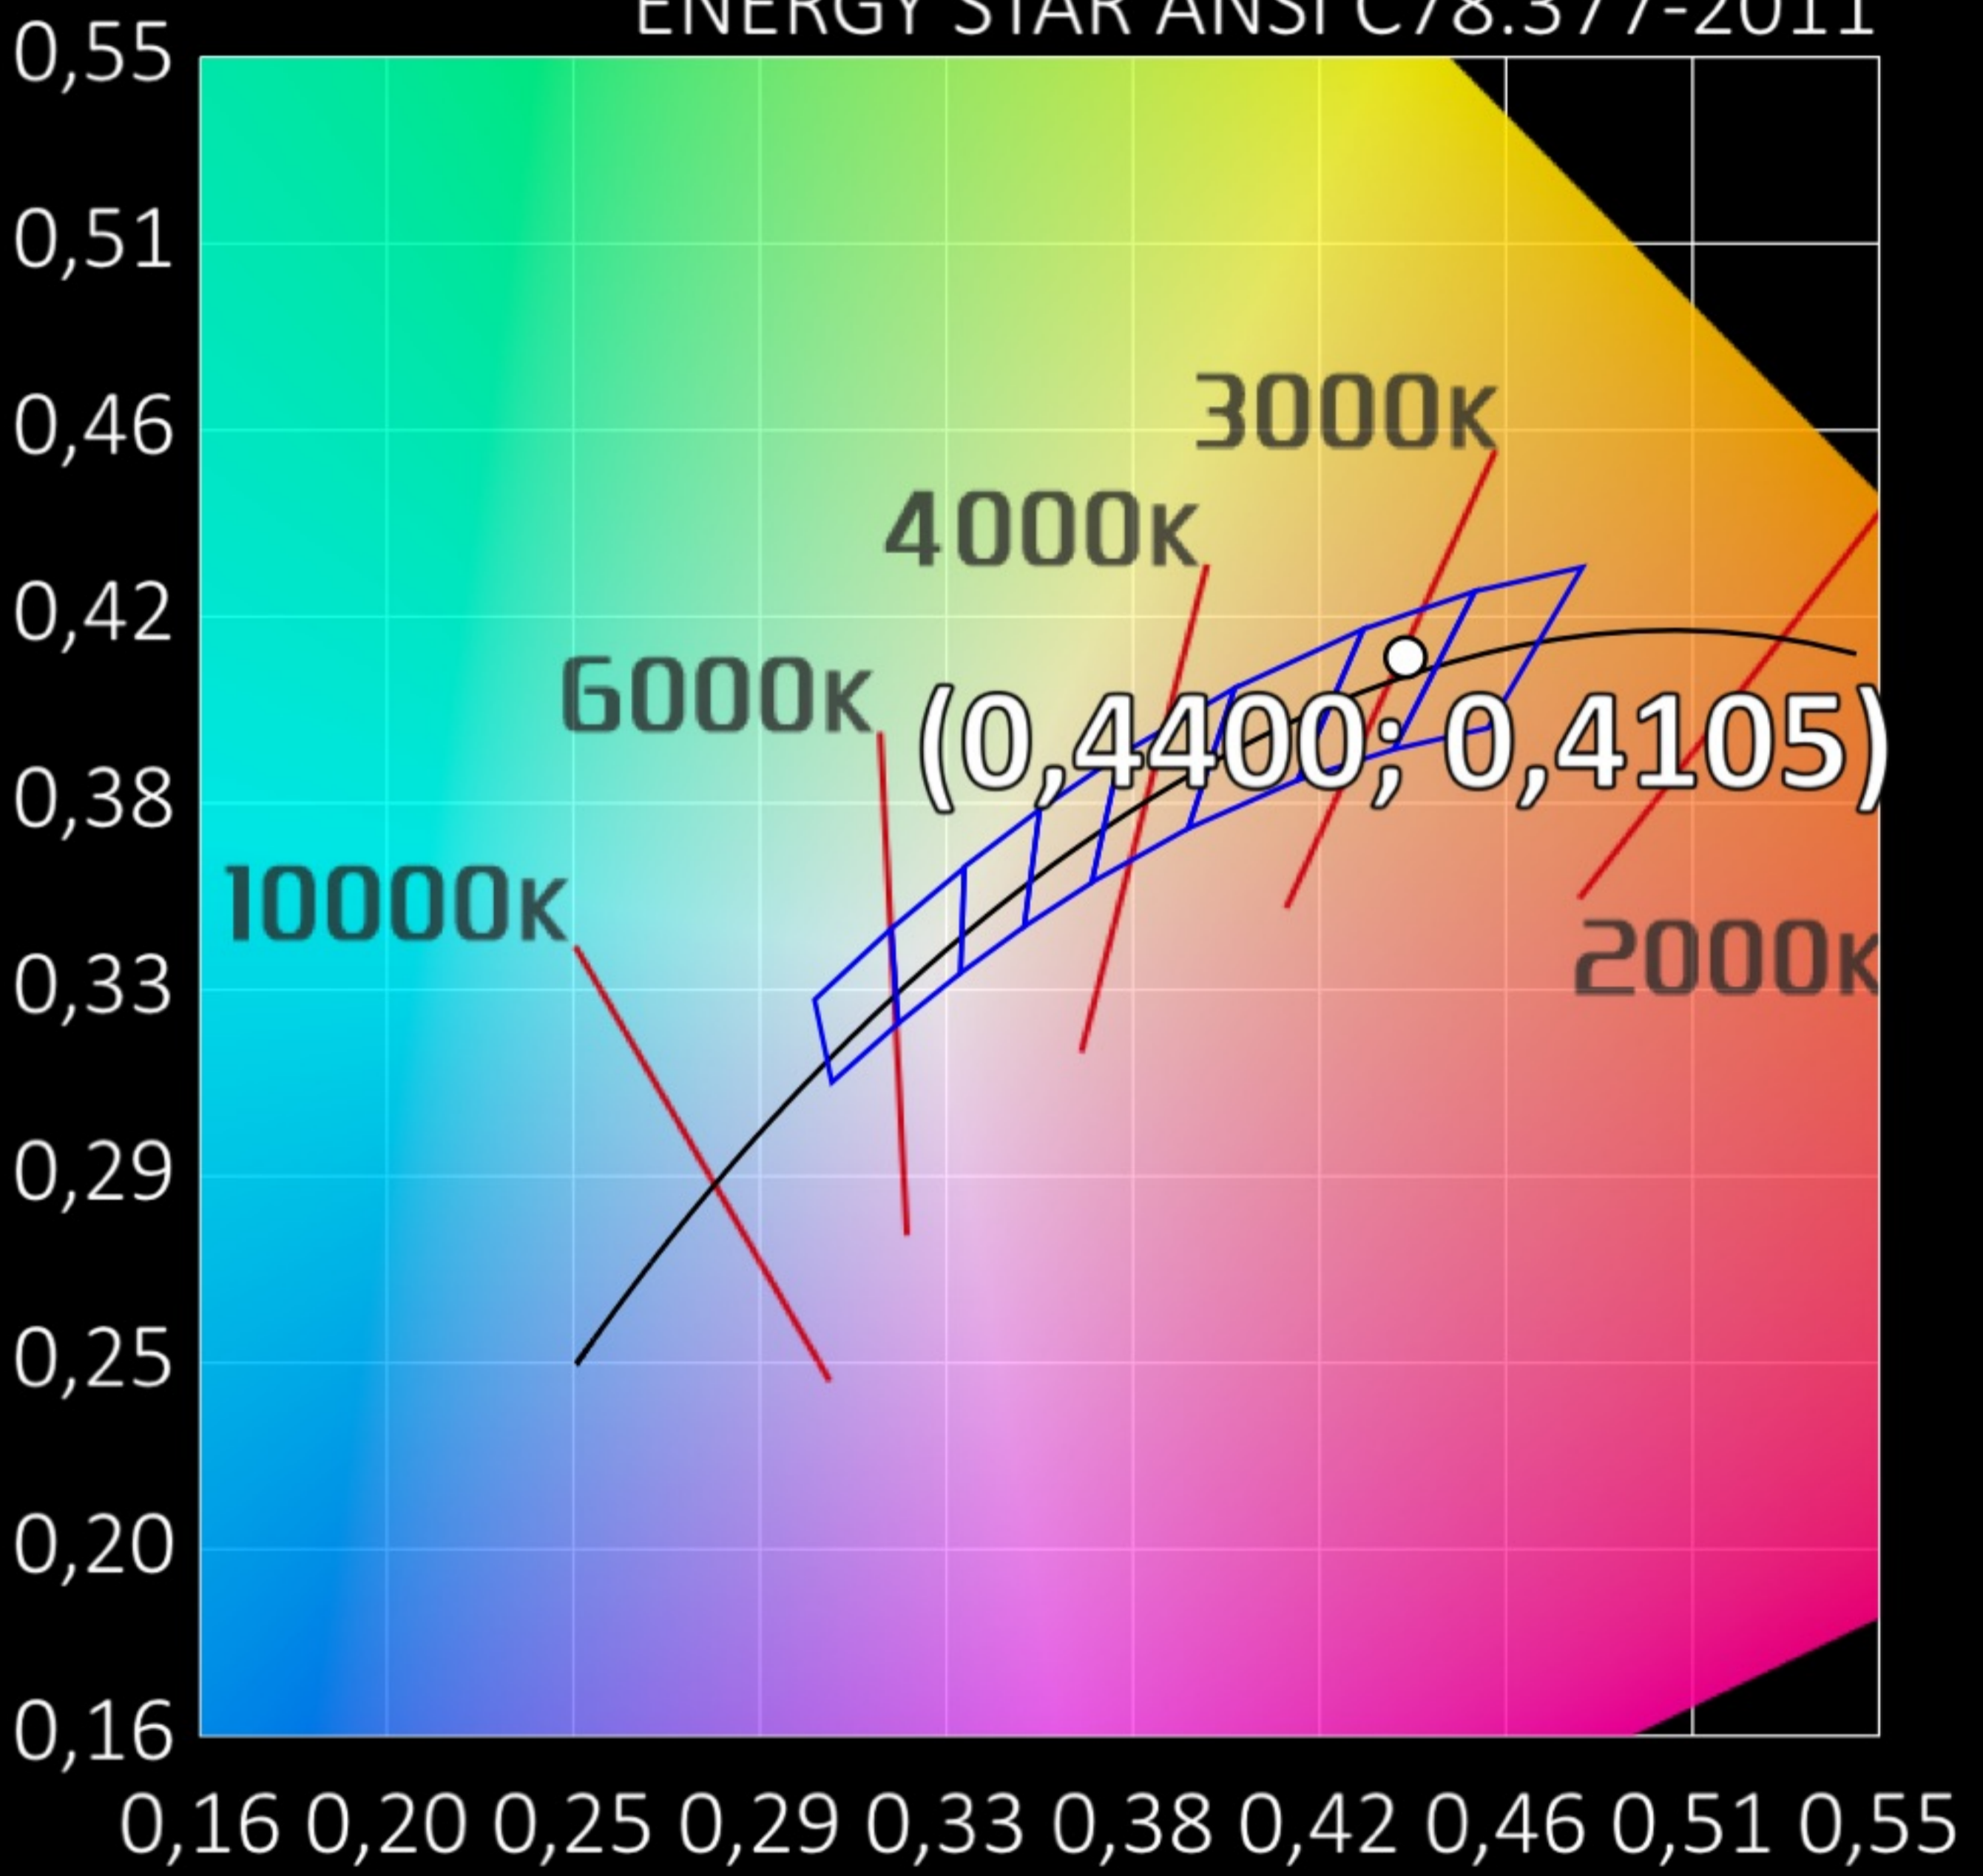

BIN

SDCM

CCT · 3001K, SDCM · 4.0

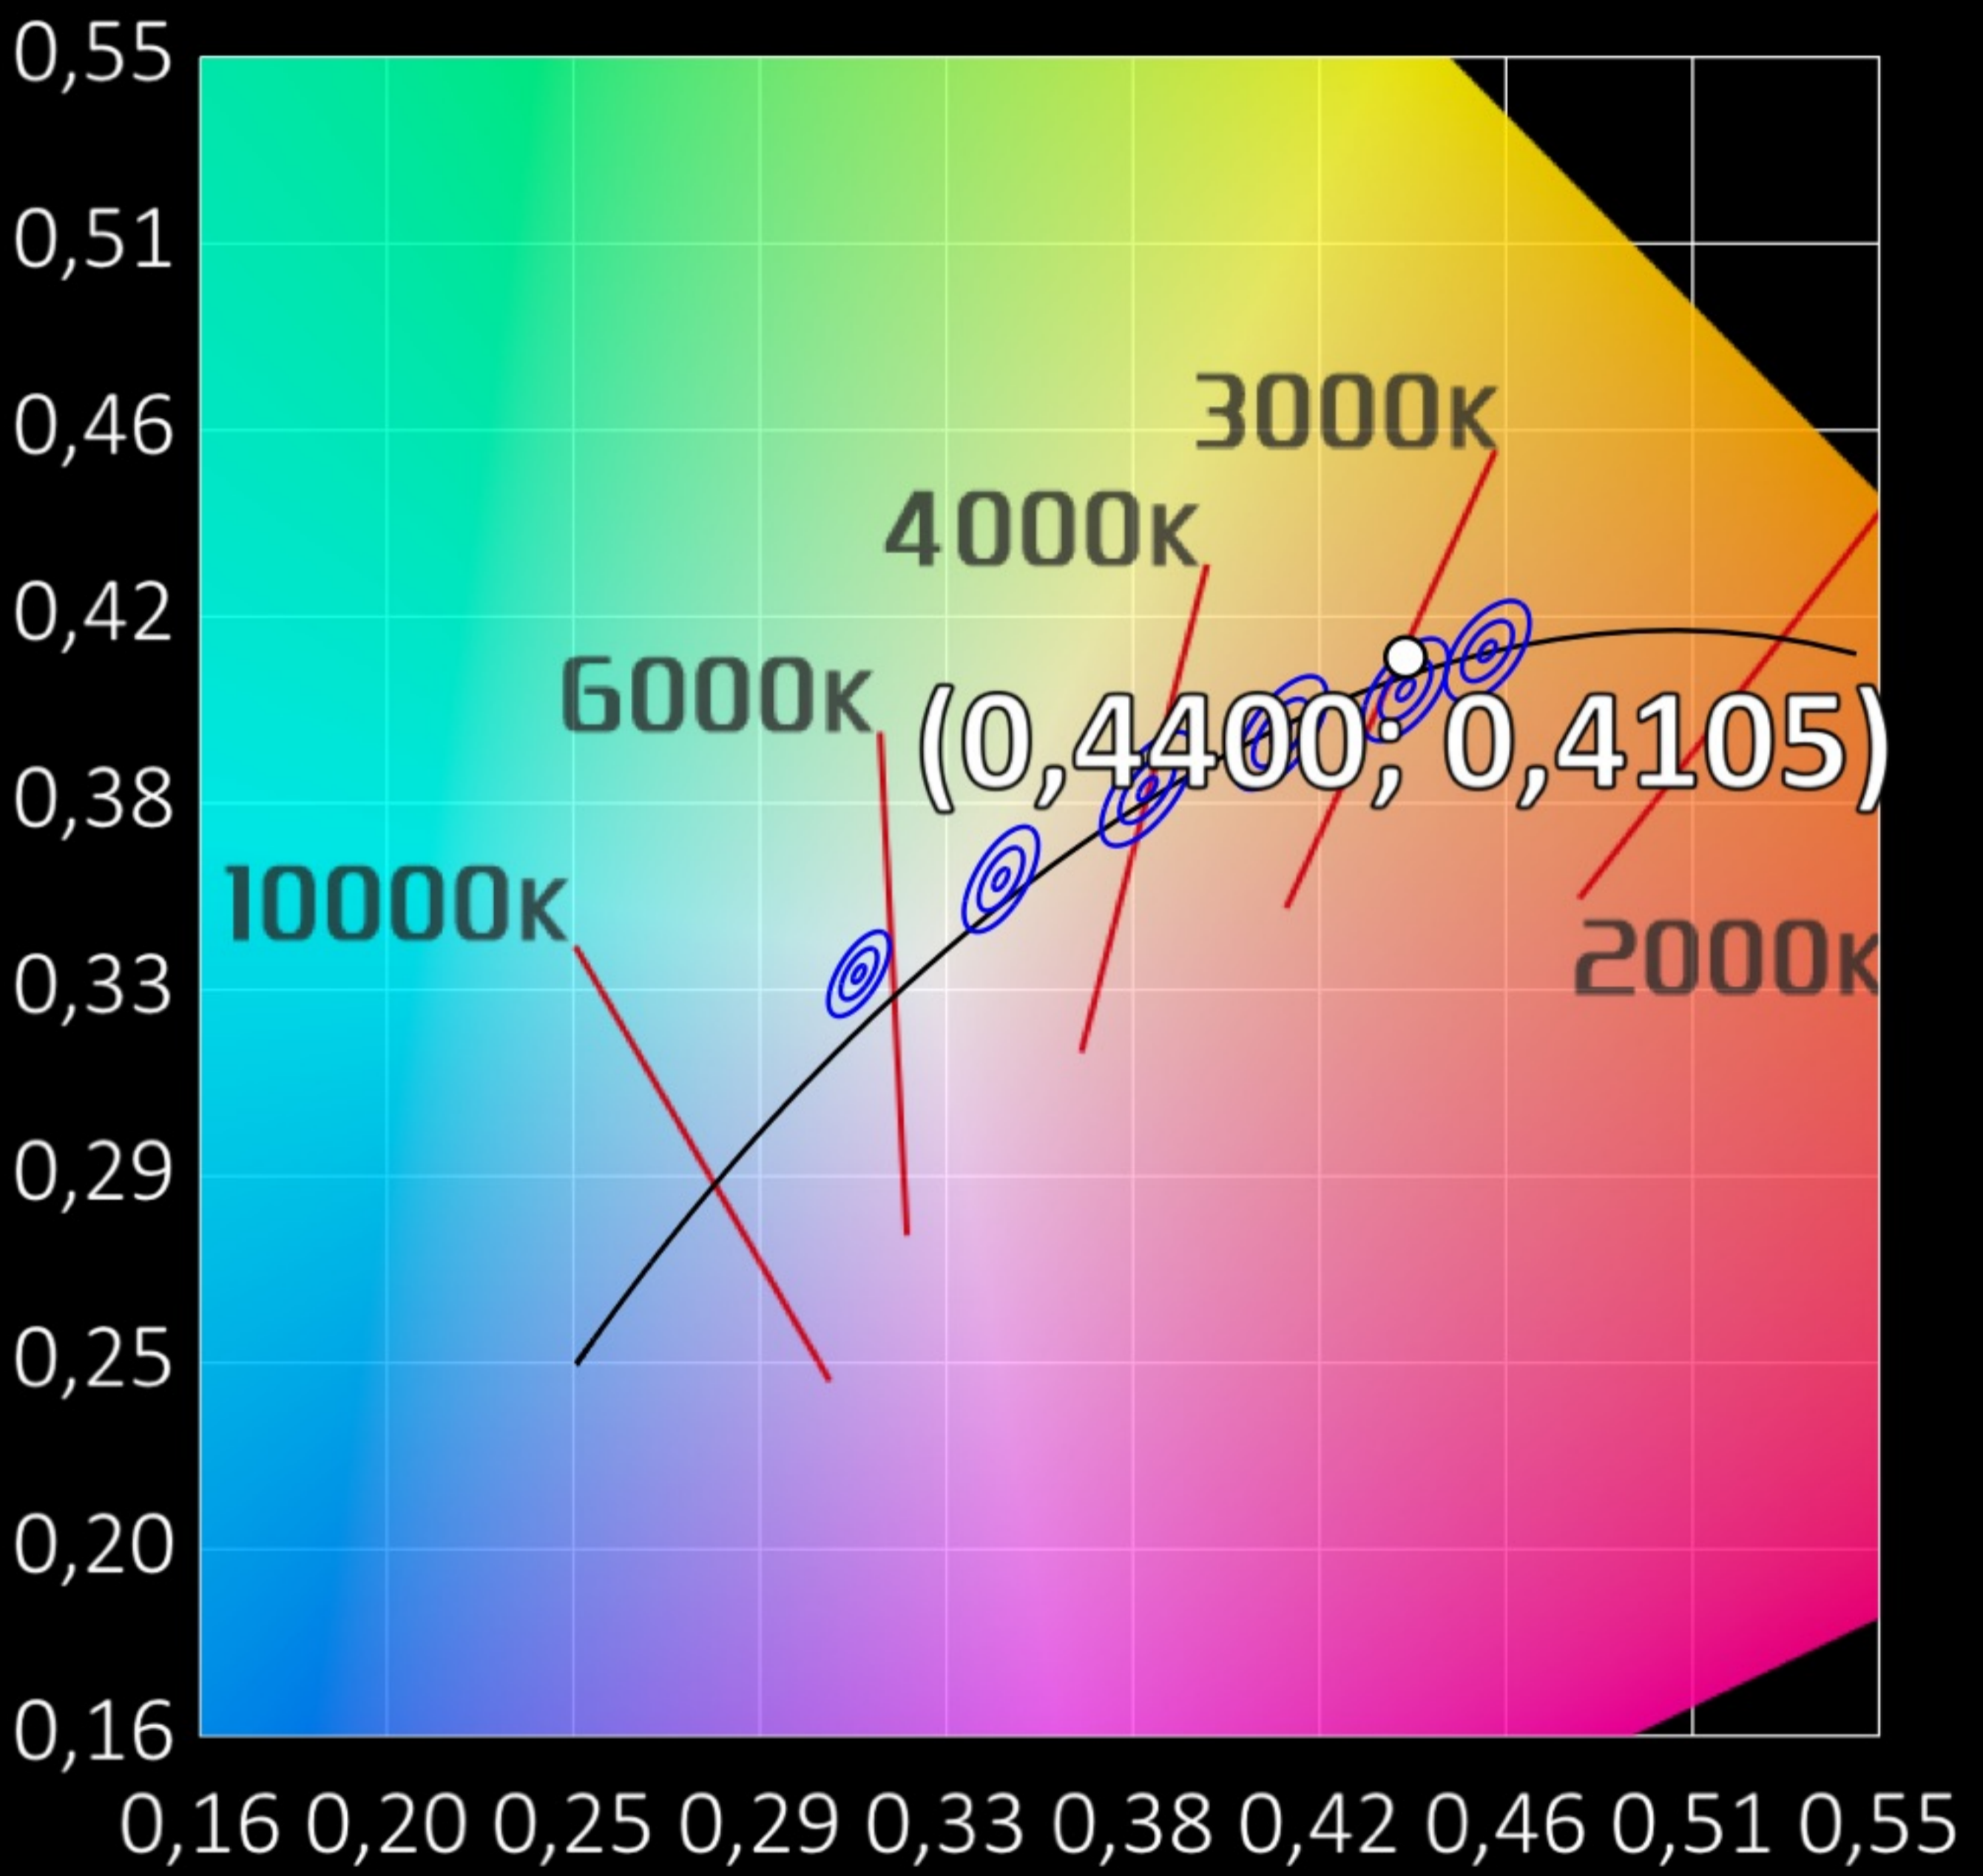

Eb

1.52878 w/m²

Kb,v

0.00027 w/lm

BL

11.08 %

RG

Moderate

R G

Definition

Tmax(s)

RG0

Exempt

>10000 sec

RG1

Low

>100~10000 sec

RG2

Moderate


0.25~100 sec

RG3

Hight

< 0.25 sec

CCT · 3001K

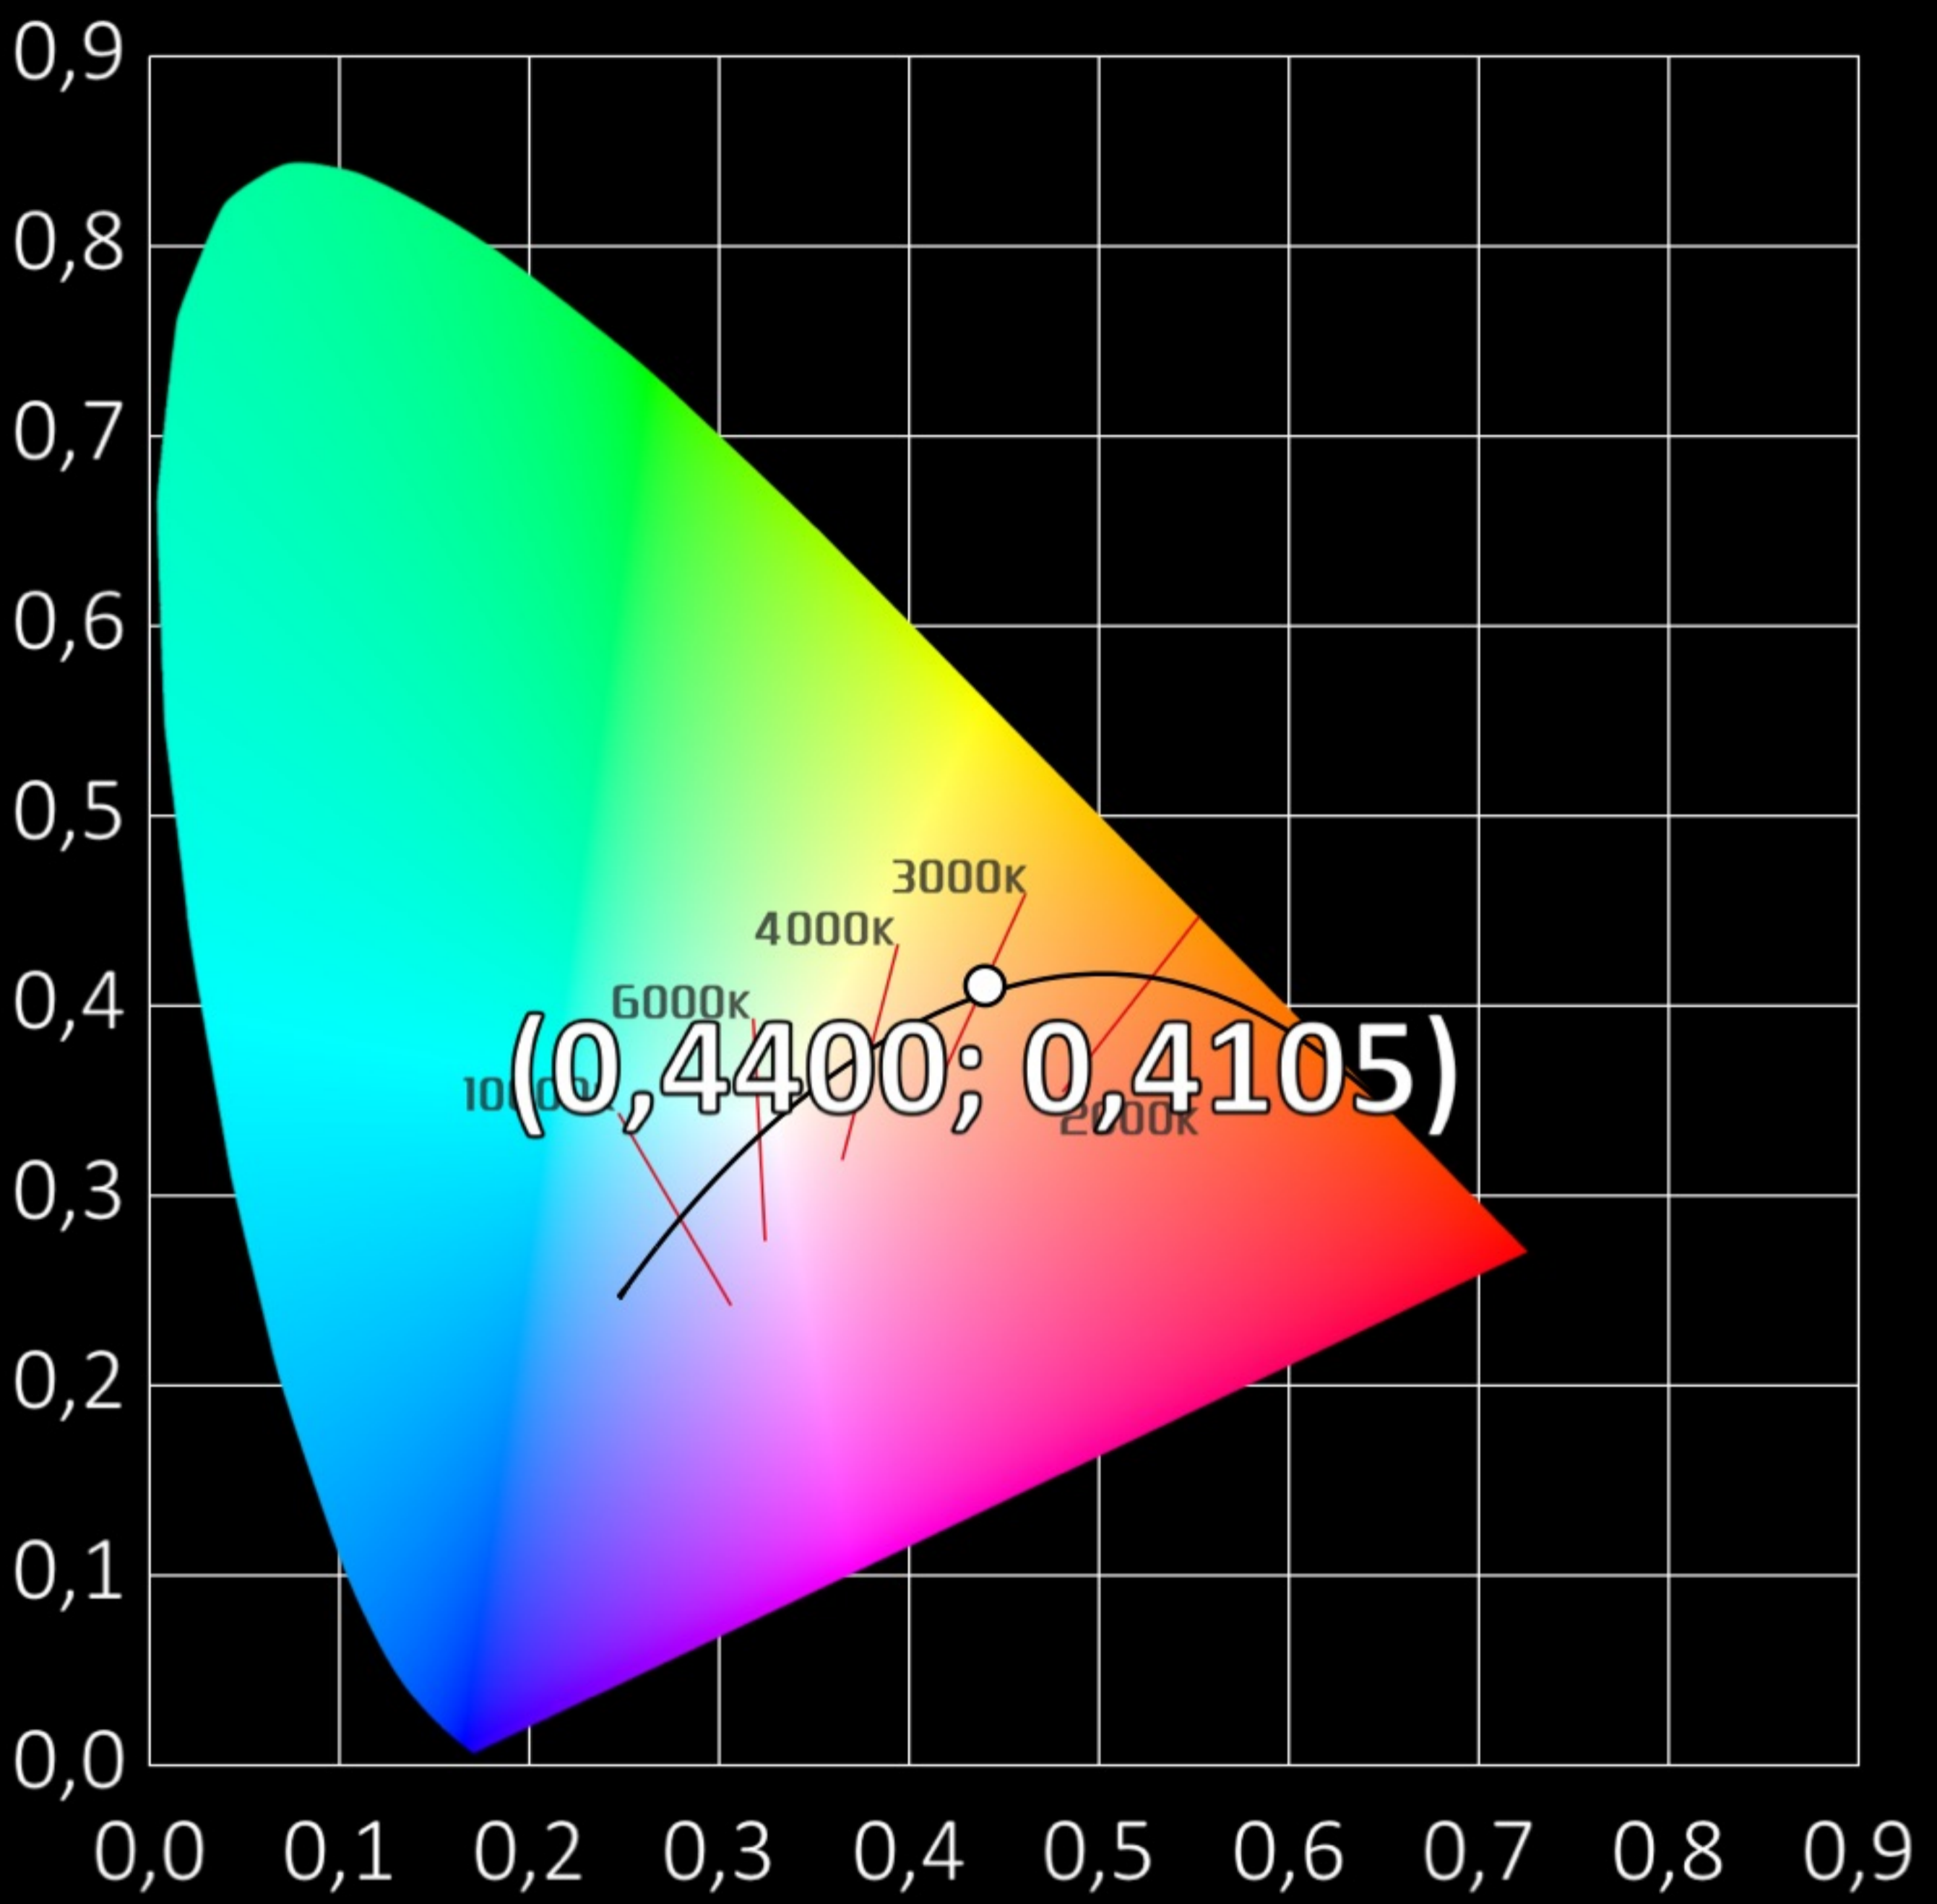

mW/m²

116,27

104,64

93,01

81,39

69,76

58,13

46,51

34,88

23,25

11,63

0,00

380 420 460 500 540 580 620 660 700 740 780

(637 nm; 116,27 mW/m²)

